

Product description	M8 female cable connector, Contacts: 4, 3.5 - 5.0 mm, shieldable, solder, IP67, UL listed
Area	M8 series 768
Order number	99 3362 00 04

Illustration	Scale drawing	Contact arrangement (Plug-in side)								
		<table style="margin-left: auto; margin-right: 0;"> <tr><td>1</td><td>brau</td></tr> <tr><td>2</td><td>weiß</td></tr> <tr><td>3</td><td>blau</td></tr> <tr><td>4</td><td>schwarz</td></tr> </table>	1	brau	2	weiß	3	blau	4	schwarz
1	brau									
2	weiß									
3	blau									
4	schwarz									

You can find the component part drawing and assembly instructions on the next page.

Technical data

General features

Order number	99 3362 00 04
Connector design	female cable connector
Version	connector female
Connector locking system	straight
Termination	screw
Degree of protection	solder
Cross-sectional area	IP67
Cable outlet	0.25 mm ² / AWG 24
Temperature range from/to	3.5 - 5.0 mm
Mechanical operation	-40 °C / 85 °C
Weight (g)	> 100 Mating cycles
Customs tariff number	16.589
	85369010

Electrical parameters

Rated voltage	60 V
Rated impulse voltage	1500 V
Rated current (40 °C)	4 A
Pollution degree	3
Overvoltage category	III
Insulating material group	III
EMC compliance	shieldable
Shield connection	shield ring

Material

Contact body material	PA
Contact material	CuSn (bronze)
Contact plating	Au (gold)
Locking material	CuZn (Brass nicke,l plated)
REACH SVHC	CAS 96-45-7 (Imidazolidine-2-thione)
	CAS 7439-92-1 (Lead)

Authorization/approvals

Approval 1	UL listed
------------	-----------

Classifications


eCl@ss 11.1	27-44-01-02
ETIM 7.0	EC002635

Declarations of conformity


Low Voltage Directive	2014/35/EU (EN 60204-1:2018;EN 60529:1991)
-----------------------	--

Product description **M8 female cable connector, Contacts: 4, 3.5 - 5.0 mm, shieldable, solder, IP67, UL listed**
 Area **M8 series 768**
 Order number **99 3362 00 04**

Component part drawing

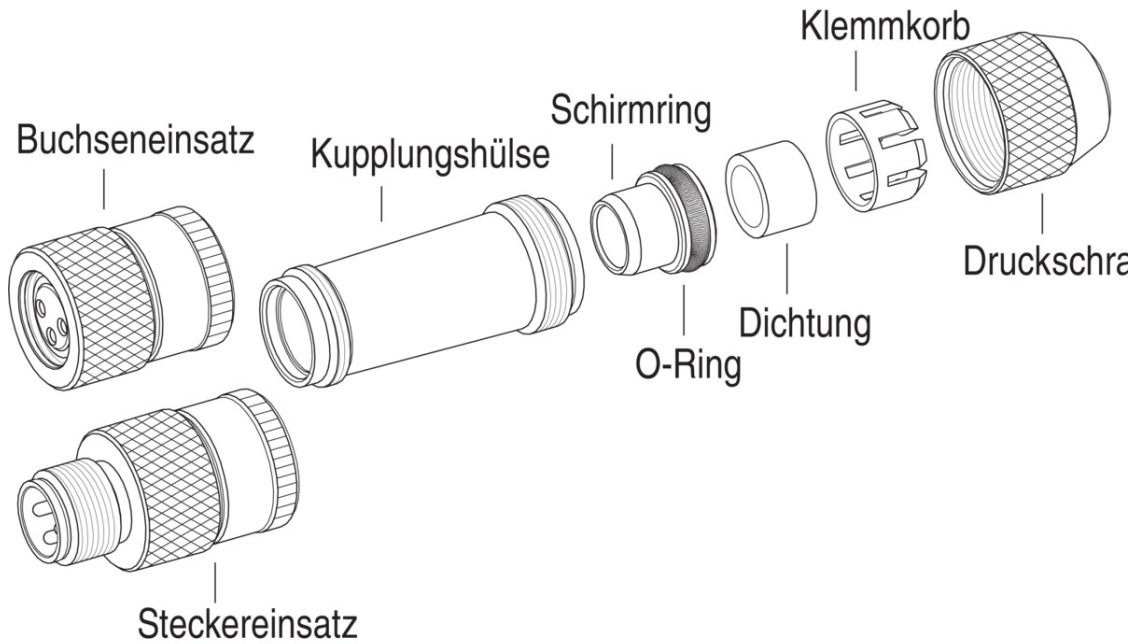

Assembly instructions / Panel cut-out

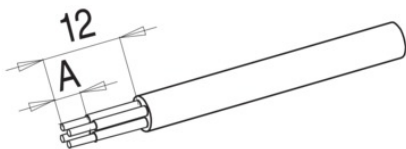

	Schraubklemmversion	Lötversion
Maß A/mm	4	3

Product description	M8 female cable connector, Contacts: 4, 3.5 - 5.0 mm, shieldable, solder, IP67, UL listed
Area	M8 series 768
Order number	99 3362 00 04

Security notices

The connectors have been developed for applications in plant engineering, control and electrical equipment construction. The user is responsible for checking whether the connectors can also be used in other areas of application.

Plug connectors with enclosure protection IP 67 and IP 68 are not suitable for use under water. When used outdoors, the plug connectors must be protected separately against corrosion. For further information on the IP protection classes, please refer to the "Technical Information" download centre. To lock the cable connector with the device connector, the threaded ring is tightened "hand-tight" (approx. 50 cNm).