


Product description	M12-A female cable connector, Contacts: 8, shielded, moulded cable, IP67, UL, PUR grey, 7 x 0.25 mm <sup>2</sup> , 5 m
Area	M12-A series 763
Part no.	77 3430 0000 50608-0500

### Illustration



### Scale drawing

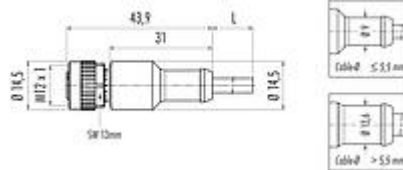

### Contact arrangement (Plug-in side)



not shielded

- 1 white
- 2 brown
- 3 green
- 4 yellow
- 5 grey
- 6 pink
- 7 blue
- 8 shield

## Technical data

### General features

Part no.	<b>77 3430 0000 50608-0500</b>
	Alternative part no.: 79 3480 35 08
Notice	Please note that, due to the change from the old to the new order number, there may be deviations in the technical specifications. For questions about product details, please use the 'Contact Customer Service' form on the right.
Connector design	female cable connector
Cable length	5 m
Version	female straight
Connector locking system	screw
Termination	moulded cable
Degree of protection	IP67
Cross-sectional area	0.25 mm <sup>2</sup> / AWG 24
Temperature range from/to	-25 °C / 90 °C
Mechanical operation	> 100 Mating cycles
Weight (g)	119.00
Customs tariff number	85444290

### Electrical parameters

Rated voltage	30 V
Rated impulse voltage	800 V
Rated current (40 °C)	2,0 A

# Product data sheet

## Automation technology - sensors and actuators



Product description	M12-A female cable connector, Contacts: 8, shielded, moulded cable, IP67, UL, PUR grey, 7 x 0.25 mm <sup>2</sup> , 5 m
Area	M12-A series 763
Part no.	77 3430 0000 50608-0500

Insulation resistance	≥ 10 <sup>10</sup> Ω
Pollution degree	3
Overvoltage category	II
Insulating material group	II
EMC compliance	shielded
Shield connection	Shield on pin 8

### Material

Housing material	PUR
Contact body material	PUR
Contact material	CuSn (bronze)
Contact plating	Au (gold)
Locking material	Zinc die-cast nickel-plated
REACH SVHC	None (No pollutants)
SCIP number	SCIP-number not available

### Authorization/approvals

Approvals	UL
-----------	----

### Classifications

eCl@ss 11.1	27-06-03-11
ETIM 7.0	EC001855

### Declarations of conformity

RoHS Directive	2011/65/EU (EN 50581:2012)
----------------	----------------------------

### Cable data - Structure of the cable

Cable diameter	5.7 mm
Cross section	7 x 0.25 mm <sup>2</sup>
Sheath material	PUR
Single-lead insulation	PP9Y halogen-free
Single-lead structure	32 x 0.10 mm
Cable color	grey

### Cable data - Electrical properties

Conductor resistance	79 Ω/Km (20°C)
----------------------	----------------

Product description	M12-A female cable connector, Contacts: 8, shielded, moulded cable, IP67, UL, PUR grey, 7 x 0.25 mm <sup>2</sup> , 5 m
Area	M12-A series 763
Part no.	77 3430 0000 50608-0500

#### Cable data - Mechanical properties

Bending radius, fixed cable	$\geq 5 \times \varnothing$
Bending radius, moving cable	$\geq 10 \times \varnothing$
Bending cycles	>2 million
Permitted acceleration	5 m/s <sup>2</sup>
Travel distance, horizontal	5 m/s <sup>2</sup> -> 5 m
Travel distance, vertical	5 m/s <sup>2</sup> -> 2 m
Travel speed	$\leq 200$ m/min (5 m horizontal distance)

#### Cable data - Thermal properties

Temperature range cable in move from/to	-25 °C / 80 °C
Temperature range cable fixed from/to	-50 °C / 80 °C

#### Cable data - Other features

Halogen free	Yes
--------------	-----

Product description	<b>M12-A female cable connector, Contacts: 8, shielded, moulded cable, IP67, UL, PUR grey, 7 x 0.25 mm<sup>2</sup>, 5 m</b>
Area	<b>M12-A series 763</b>
Part no.	<b>77 3430 0000 50608-0500</b>

## Security notices

The connector must not be plugged or unplugged under load. Non-observance and improper use can result in personal injury.

The connectors have been developed for applications in plant engineering, control and electrical equipment construction. The user is responsible for checking whether the connectors can also be used in other areas of application.

The user must take suitable safety precautions to ensure that the connector cannot be accidentally disconnected.

Plug connectors with enclosure protection IP 67 and IP 68 are not suitable for use under water. For further information on the IP protection classes, please refer to the "Technical Information" download centre.

To lock the cable connector with the device connector, the threaded ring is tightened "hand-tight" (approx. 60 cNm).