




These dimensions will be supplied instead of delivery  
Any respective dimension

These data should be checked before ordering  
Respective technical drawing



Varianten/ Variants

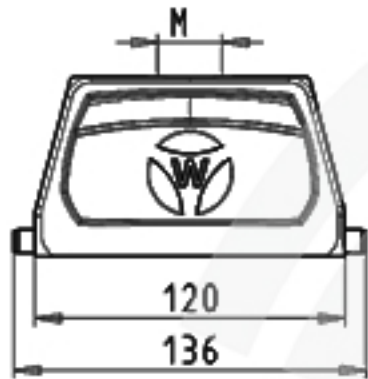

71.352.2435.5	BAS GOT GI 24	M32 M25	A5	Kabelverschraubung(KV), IP65 /Cable gland(CG), IP65	
71.352.2435.4	BAS GOT GI 24	M32 M25	A4	KV mit Zugentlastung, IP54 /CG with strain relief, IP54	
71.352.2435.3	BAS GOT GI 24	M32 M25	A3	KV mit Zugentlastung und Knickschutz, IP54 /CG with strain relief and bend support, IP54	
71.352.2435.2	BAS GOT GI 24	M32 M25	A2	Zwischenstutzen /Bushing	
71.352.2435.1	BAS GOT GI 24	M32 M25	A1	Gewindebohrung /Thread hole	X
71.352.2435.0	BAS GOT GI 24	M32 M25	A0	Kabelverschraubung(KV), IP54 /Cable gland(CG), IP54	
Bestellnummer /Order number	Typ /Type	Varianten /Variants			Be- merkungen /Remarks

Weitere Daten siehe KATALOG oder eKatalog. [www.wieland-electric.com](http://www.wieland-electric.com)  
Additional data see CATALOG or eCatalog. [eshop.wieland-electric.com](http://eshop.wieland-electric.com)

Referenzgröße Size 100 (DIN EN 60729) / Toleranzsystem Size 100 (DIN EN 60729) (This ISO-standard describes the envelope principle. According to the envelope principle the deviations of form and parallelism are limited by the size tolerances.)		Ja/Yes <input type="checkbox"/> Stufenlos/Continuously nach IEC 60384-14 ist einstellbar. Continuously with Wieland document 00-100-05/03 (List of prohibited / desirable hazardous substances) to be declared!	
Feuertoleranz nach General tolerance		CEC - Zeichnung, keine manuellen Änderungen CEC - drawing, no manual modifications allowed	1. Verwendung: First Use: -
/ Werkstoff/Material Aluminium		2013 TopDate Name	Zeichnung Nr./Drawing No.
/ Oberflächen-/ coated beschichtet/ coated		17.09. Trecker	71.352.2435.0 13K
/ Maßstab/Scale 1:2		grau/ grey	Note in all dimensions are in mm
/ Vol. m³/ft³, l/gal		Ersatz für/Replacement for: -	
/		Typ BASIC	Bezeichnung/Title GEHAUSEOBERTE IL
/ Änderung/Revision		Baugröße 24-Kabelabgang oben-M25/M32 Hood size 24-cable outlet top-M25/M32	

Tel: +98 21 88505119  
www.shairad-sanat.com

Fax: +98 21 88505102  
info@shairad-sanat.com

Wieland and its subsidiaries are ISO 9001, ISO 14001, ISO 45001, and ISO 13843 certified.  
 Wieland and its subsidiaries are ISO 9001, ISO 14001, ISO 45001, and ISO 13843 certified.  
 Wieland and its subsidiaries are ISO 9001, ISO 14001, ISO 45001, and ISO 13843 certified.