


Product description	M12-A male cable connector, Contacts: 8, shielded, moulded cable, IP67, UL, PUR black, 8 x 0.25 mm ² , 2 m
Area	M12-A series 763
Part no.	77 3529 0000 50708-0200

Illustration



Scale drawing

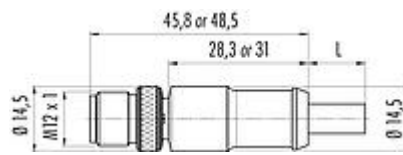

Contact arrangement (Plug-in side)



- 1 white
- 2 brown
- 3 green
- 4 yellow
- 5 grey
- 6 pink
- 7 blue
- 8 red

Technical data

General features

Part no.	77 3529 0000 50708-0200
	Alternative part no.: 79 3579 32 08
Notice	Please note that, due to the change from the old to the new order number, there may be deviations in the technical specifications. For questions about product details, please use the 'Contact Customer Service' form on the right.
Connector design	male cable connector
Cable length	2 m
Version	male straight
Connector locking system	screw
Termination	moulded cable
Degree of protection	IP67
Cross-sectional area	0.25 mm ² / AWG 24
Temperature range from/to	-25 °C / 90 °C
Mechanical operation	> 100 Mating cycles
Weight (g)	126.00
Customs tariff number	85444290

Electrical parameters

Rated voltage	30 V
Rated voltage UL	2457
Rated impulse voltage	800 V
Rated current (40 °C)	2,0 A
Insulation resistance	≥ 10 ¹⁰ Ω

Product data sheet

Automation technology - sensors and actuators



Product description	M12-A male cable connector, Contacts: 8, shielded, moulded cable, IP67, UL, PUR black, 8 x 0.25 mm ² , 2 m
Area	M12-A series 763
Part no.	77 3529 0000 50708-0200

Pollution degree	3
Overvoltage category	II
Insulating material group	II
EMC compliance	shielded
Shield connection	Shield on the threaded ring

Material

Housing material	PUR
Contact body material	PUR
Contact material	CuZn (brass)
Contact plating	Au (gold)
Locking material	CuZn (brass)
REACH SVHC	CAS 7439-92-1 (Lead)
SCIP number	8dfac39c-7f6c-4952-bdf1-d5dc3048cee0

Authorization/approvals

Approvals	UL
-----------	----

Classifications

eCl@ss 11.1	27-06-03-11
ETIM 7.0	EC001855

Declarations of conformity

RoHS Directive	2011/65/EU (EN 50581:2012)
----------------	----------------------------

Cable data - Structure of the cable

Cable diameter	6.0 mm
Cross section	8 x 0.25 mm ²
Sheath material	PUR
Single-lead insulation	PP9Y halogen-free
Single-lead structure	32 x 0.10 mm
Cable color	black

Cable data - Electrical properties

Conductor resistance	79 Ω/Km (20°C)
----------------------	----------------

Cable data - Mechanical properties

Bending radius, fixed cable	≥ 5 x Ø
-----------------------------	---------

Product description	M12-A male cable connector, Contacts: 8, shielded, moulded cable, IP67, UL, PUR black, 8 x 0.25 mm ² , 2 m
Area	M12-A series 763
Part no.	77 3529 0000 50708-0200

Bending radius, moving cable	≥ 10 x Ø
Bending cycles	>2 million
Permitted acceleration	5 m/s ²
Travel distance, horizontal	5 m/s ² -> 5 m
Travel distance, vertical	5 m/s ² -> 2 m
Travel speed	≤ 200 m/min (5 m horizontal distance)

Cable data - Thermal properties

Temperature range cable in move from/to	-25 °C / 90 °C
Temperature range cable fixed from/to	-50 °C / 90 °C

Cable data - Other features

Halogen free	Yes
--------------	-----

Product description	M12-A male cable connector, Contacts: 8, shielded, moulded cable, IP67, UL, PUR black, 8 x 0.25 mm², 2 m
Area	M12-A series 763
Part no.	77 3529 0000 50708-0200

Security notices

The connector must not be plugged or unplugged under load. Non-observance and improper use can result in personal injury.

The connectors have been developed for applications in plant engineering, control and electrical equipment construction. The user is responsible for checking whether the connectors can also be used in other areas of application.

The user must take suitable safety precautions to ensure that the connector cannot be accidentally disconnected.

Plug connectors with enclosure protection IP 67 and IP 68 are not suitable for use under water. For further information on the IP protection classes, please refer to the "Technical Information" download centre.

To lock the cable connector with the device connector, the threaded ring is tightened "hand-tight" (approx. 60 cNm).