


Product description	Connecting Cables double distributor, Contacts: 5/4, unshielded, pluggable, IP68, UL, M12x1.0
Area	Connecting Cables series 765
Part no.	79 5207 00 05


Illustration




Pin assignment plans

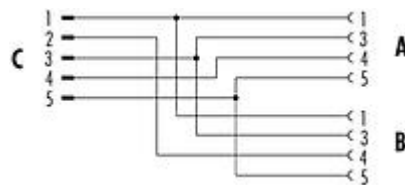

Scale drawing

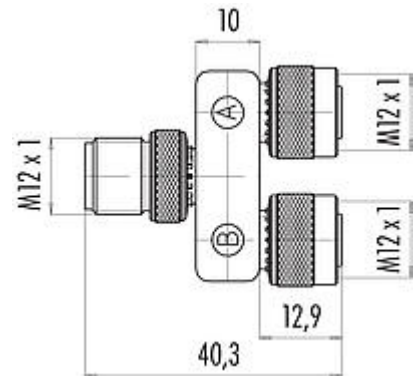

Contact arrangement (Plug-in side)

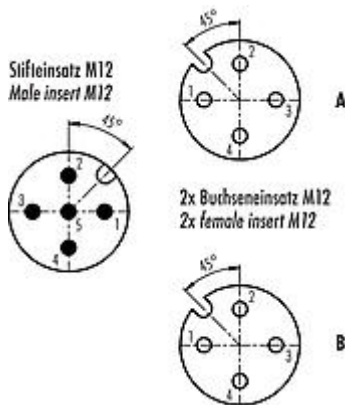

Technical data

General features

Part no.	79 5207 00 05
Connector design	double distributor
Version	distributor
Connector locking system	screw
Termination	pluggable
Degree of protection	IP68

Product data sheet

Automation technology - sensors and actuators



Product description	Connecting Cables double distributor, Contacts: 5/4, unshielded, pluggable, IP68, UL, M12x1.0
Area Part no.	Connecting Cables series 765 79 5207 00 05

Temperature range from/to	-25 °C / 85 °C
Mechanical operation	> 100 Mating cycles
Weight (g)	27.00
Customs tariff number	85369010

Electrical parameters

Rated voltage	250 V
Rated impulse voltage	2500 V
Rated current (40 °C)	4,0 A
Pollution degree	3
Overvoltage category	II
Insulating material group	II
EMC compliance	unshielded

Material

Housing material	PUR
Contact body material	PUR
Contact material	CuZn (brass) / CuSn (bronze)
Contact plating	Au (gold)
Locking material	Zinc die-cast nickel-plated
REACH SVHC	CAS 7439-92-1 (Lead)
SCIP number	429d6db8-1b47-4790-8d51-58a63d0b48ca

Authorization/approvals

Approvals	UL
-----------	----

Classifications

eCl@ss 11.1	27-06-03-11
ETIM 7.0	EC001855

Declarations of conformity

Low Voltage Directive	2014/35/EU (EN 60204-1:2018;EN 60529:1991)
-----------------------	--

Product description	Connecting Cables double distributor, Contacts: 5/4, unshielded, pluggable, IP68, UL, M12x1.0
Area Part no.	Connecting Cables series 765 79 5207 00 05

Security notices

The connector must not be plugged or unplugged under load. Non-observance and improper use can result in personal injury.

The connectors have been developed for applications in plant engineering, control and electrical equipment construction. The user is responsible for checking whether the connectors can also be used in other areas of application.

Plug connectors with enclosure protection IP 67 and IP 68 are not suitable for use under water. When used outdoors, the plug connectors must be protected separately against corrosion. For further information on the IP protection classes, please refer to the "Technical Information" download centre.

To lock the cable connector with the device connector, the threaded ring is tightened "hand-tight" (approx. 60 cNm).